




## CB 18-2 SR Copper FPLR Cable

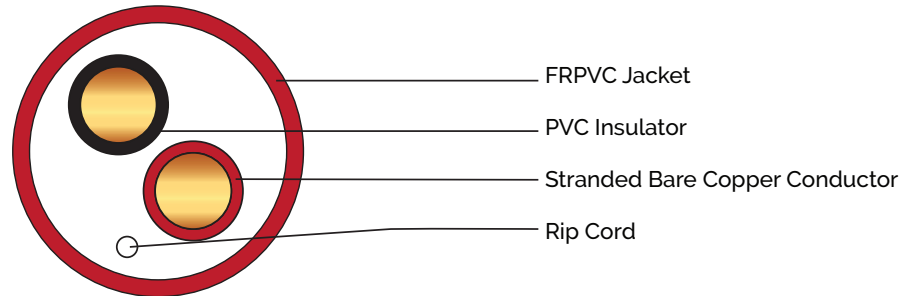

### CONSTRUCTION DETAILS

Cener Conductor	18AWG 7X0.38mm Stranded Bare Copper
Insulation	Thickness 0.35 Diameter 1.75mm PVC
Ripcoad	Available
Jacket	Thickness 0.50mm Diameter 2.8x4.55mm FRPVC

### APPLICATIONS

Fire Alarm System  
Initiating Devices  
Signaling Devices  
Indoor  
Commercial/Residential

### PACKING & COLORS

500FT in Pull Box  
Colors: Red Jacket( Red & Black insulation)

