




CAT6 UTP Copper Direct Burial Network Cable

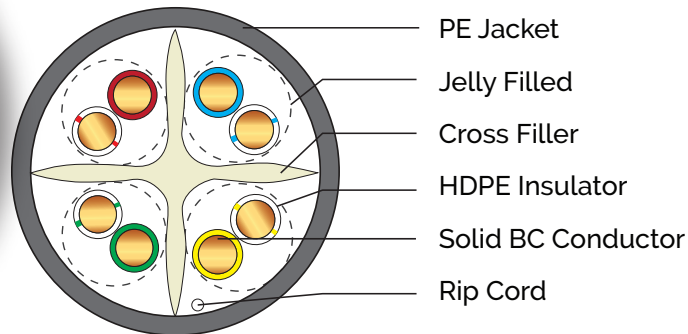

CONSTRUCTION DETAILS

Cener Conductor	23AWG Solid Bare Copper
Insulation	Thickness 0.19 Diameter 0.95mm HDPE
Cross Filler	Available
Rip cord	Available
Jacket	Thickness 0.54mm Diameter 6mm+/-0.15mm PE

APPLICATIONS

10/100/1000BASE-T Networks,
Telecommunications
Tested to 550MHZ
Operating temperature range -30°C to 75°C

PACKING & COLORS

Wooden Spool
Available Colors: Black

