

# Product Technical Specifications



CCTV SECURITY CAMERA

SKU #

GESSXHD-IP740QMVR-W3




# GESSXHD-IP740QMVR-W3

GESSXtremeHD™

Excellent security camera IP system characterized by the highest definition and great fidelity, captures video at 3 megapixels resolution.



IP



1536p resolution



Weather proof



Vandal proof

## MAIN FEATURES

- 1/3" 4.0 Mega Progressive Scan CMOS
- H.264 / H.265 4.0 Mega Realtime Recording
- Support Intrusion Detection, Smart IR
- 2D/3D DNR, DWDR, ROI, Anti-fog, IR\_CUT
- Triple-Stream, Mobile APP, Support P2P
- Support PoE, Reset button, IR Array, TF Card
- Motorized Lens
- Support ONVIF, IP66

## RECOMMENDED USE


This product is ideal for:

- Applications that require the camera to be mounted higher than normal installation heights; such as high ceilings or walls.
- Long Range distances.
- Commonly User in Outdoor Applications.

## IP 66

Completely protected against dust and water projected in powerful jets (12.5mm nozzle) against the enclosure from any direction shall have no harmful effects.

## DIMENSIONS

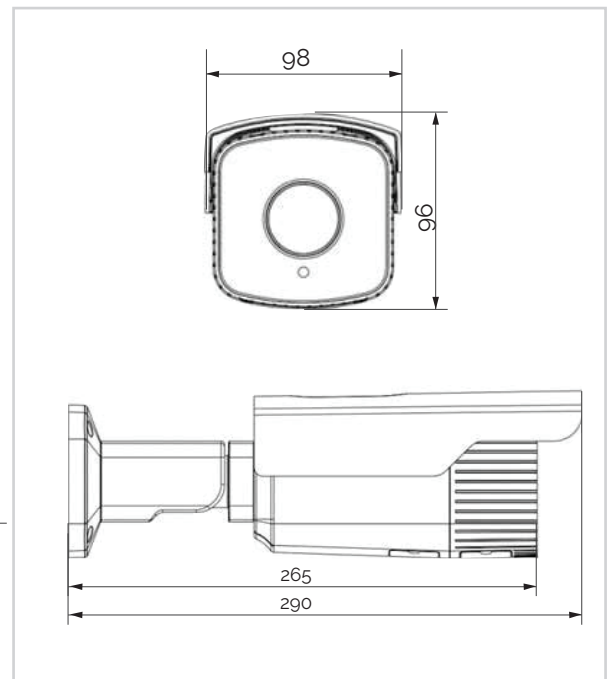



## TECHNICAL SPECIFICATIONS

SKU #

# CESSXHD-IP740QMVR-W3

Sensor	1/3" 4.0 Mega progressive scan CMOS
Min.illumination	Color: 0.01Lux/F1.2; 0Lux/F1.2(IR ON)
Lens	3.3-10.5mm Motorized lens
IR distance	50 M
Electronic shutter	Auto(1/25s-1/10000sAdjustable)
Day/Night	Auto/Color / B&W (IR_CUT)
Noise Reduction	2D/3D Digital Noise Reduction
Anti-fog	Support
WDR	Digital WDR
Image Adjustment	Sharpness,Brightness,Saturation,ContrastAdjustable
Video Encoding	H.264, H.265
Encoding Type	H.265:MainProfile; H.264:High Profile/Main Profile/BaseLine Profile
Record Resolution	Main Stream: 2560*1440@20fps; Sub Stream: 704*576@20fps;Third Stream:1280*720@15fps
Video Bitrate Control	Support VBR/CBR
Video Bitrate Range	32Kbps-8Mbps
Audio	1 Audio Input; 1 Audio Output
Alarm	1 Audio Input; 1 Alarm Output
Storage	Support TF Card, Max 64G
RS485	Support
Reset Button	Built-in reset button
CVBS output	Support
Network Interface	RJ45 10M/100M adaptive Ethernet interface
Motion Detection	Multiple detection zones, variable sensitivity levels
ROI	Support
Corridor Mode	Support
Privacy Masking	Four zones for privacy masking
Snapshot	JPEG capture,capture resolution is the max coding resolution
Security Features	Support password protection, watermarking features
Text Overlay	Support (Channel name and time title)
Alarm	Support network anomaly,mask alarm and etc.
Intelligent Function	Support line-crossing detection
Mobile APP.	IOS, Android
Network Function	TCP/IP; UDP; HTTP; IGMP; ICMP; DHCP; RTP/RTSP; DNS; DDNS; FTP; NTP; PPPOE; UP NP SMTP; SNMP
Protocol	Support ONVIF and CGI protocol
Protection Grade	IP66
PoE	Support
Power	DC 12V
Temperature	-10C ~ +60C
Operation humidity	10%--90%
Power supply	10W MAX
Dimensions	98*96*265(mm)
Weight	1200g

www.gess-inc.com info@gess-in.com

USA | PUERTO RICO | COLOMBIA



GESS<sup>®</sup>  
TECHNOLOGIES