


RG59-18/2 CCA Siamese Cable

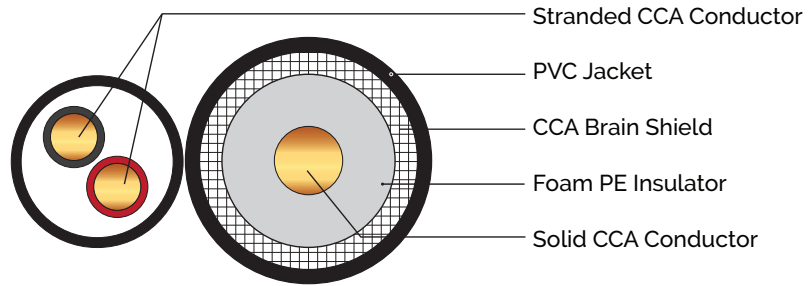

CONSTRUCTION DETAILS

Center Conductor	20AWG(0.81mm) Copper Clad Aluminum
Insulator	3.66mm Foam Polyester
Braid Shield	95% coverage (128x0.12mm) CCA
Power wire	2x18AWG (7x0.38mm) Stranded CCA
Power wire Insulator	Polyester in black & red
Jacket	Thickness 0.95mm Diameter 6.0mm PVC CM Rating

APPLICATIONS

- CCTV
- Sparker Test 3000 VAC
- Nom. Impedence $75 \pm 3 \Omega$
- Nom. Velocity of Propagation 85%
- Nom. Capacitance (pF/m) 54 ± 3
- Mechanical Characteristics:
- Operating temperature range -30°C to 75°C

PACKING & COLORS

- Plastic Reel
- Pull BOX
- Available Colors: Black/White

ATTENUATION [@68°F.(20°C.)]

Frequency (MHz)	Maximum (dB/100ft)
5	1.12
55	1.60
83	1.95
187	2.85
250	3.30
300	3.55
450	4.40
500	4.66
550	4.90
600	5.10
750	5.65
865	6.10
1000	6.55
1200	7.98
1450	8.48
1800	9.50
3000	12.40

www.gess-inc.com | info@gess-in.com

USA | PUERTO RICO | COLOMBIA